

## PTo 150/220...240 3DIM

POWERTRONIC OUTDOOR PTo | ECG for HID lamps, for outdoor lighting



### Product family features

- 3DIM functionality (StepDIM/AstroDIM/DALI)
- Energy Efficiency Index EEL: A2
- Lightning protection: up to 10 kV
- Supply voltage: 220...240 V
- Line frequency: 50...60 Hz
- Line harmonics according to EN 61000-3-2
- Immunity according to EN 61547
- RI suppression: to EN 55015
- Safety: to EN 61347-2-12
- Luminous flux factor 1 compared with CCG operation
- Not suitable for DC operation

### Product family benefits

- Energy savings up to 30 % (compared to CCG operation) thanks to 3DIM (except PTo 35)
- High surge protection: up to 3 kV (L-N) / 4 kV (L/N-PE)
- Automatic safety shutdown of lamps in the event of a defect or at end of life (EoL)
- Excellent thermal behavior for very high limit temperatures  $t_c$  and  $t_a$

### Areas of application

- Suitable for luminaires of protection classes I and II
- Suitable for outdoor applications in luminaires with IP > 54


Technical data

Electrical data

|                                          |                           |
|------------------------------------------|---------------------------|
| Lamp wattage                             | 147 W                     |
| Maximum output power                     | 147 W                     |
| Line current                             | 0.71 A <sup>1)</sup>      |
| Ignition voltage                         | 4.5 kVp                   |
| Operating frequency                      | 0.165 kHz                 |
| System wattage                           | 160.00 W                  |
| Efficiency in full-load                  | 91 %                      |
| Input voltage AC                         | 198...264 V               |
| Nominal voltage                          | 220...240 V               |
| Nominal input voltage (SD port)          | 220...240 V <sup>2)</sup> |
| Mains frequency                          | 50...60 Hz                |
| Power factor $\lambda$                   | 0.95 <sup>3)</sup>        |
| Inrush current                           | 70 A <sup>4)</sup>        |
| Max. ECG no. on circuit breaker 10 A (B) | 4 <sup>5)</sup>           |
| Max. ECG no. on circuit breaker 16 A (B) | 7 <sup>5)</sup>           |
| Max. no. of ECGs on 16A MCB with EBN-OS  | 17 <sup>5)</sup>          |
| Protective conductor current             | 0.1 mA                    |
| U-OUT (working voltage)                  | 250 V                     |
| Max. working voltage between LH and LL   | 250 V                     |
| Max. working voltage betw. LL/LH & earth | 250 V                     |
| Max. capacitance of wire ECG/lamp        | 120 pF                    |
| Surge capability (L-N)                   | 3 kV                      |
| Surge capability (L/N-Ground)            | 4 kV                      |

1) At 230 V<sub>AC</sub>  
2) In relation to L/N / Active: input current > 14 mA<sub>pk</sub> / Inactive: input current < 2 mA<sub>pk</sub>  
3) Minimum  
4)  $t_{width} = 250 \mu s$  (measured at 50 %  $I_{peak}$ )  
5) Type B

Dimensions & weight



|                                      |                           |
|--------------------------------------|---------------------------|
| Length                               | 158.0 mm                  |
| Width                                | 94.0 mm                   |
| Height                               | 42.5 mm                   |
| Mounting hole spacing, length        | 148.0 mm                  |
| Cable cross-section, input side      | 0.5...2.5 mm <sup>2</sup> |
| Cable cross-section, output side     | 0.5...2.5 mm <sup>2</sup> |
| Wire preparation length, input side  | 10...11 mm                |
| Wire preparation length, output side | 10...11 mm                |
| Product weight                       | 900.00 g                  |

Colors & materials

|                 |         |
|-----------------|---------|
| Casing material | Plastic |
|-----------------|---------|

Temperatures & operating conditions

|                                      |              |
|--------------------------------------|--------------|
| Ambient temperature range            | -25...+55 °C |
| Maximum temperature at tc test point | 85 °C        |

Lifespan

|              |                       |
|--------------|-----------------------|
| ECG lifetime | 60000 h <sup>1)</sup> |
|--------------|-----------------------|

<sup>1)</sup> At T<sub>case</sub> = 80°C at T<sub>c</sub> point / 10% failure rate

Expected Lifetime

|                         |                              |       |       |   |
|-------------------------|------------------------------|-------|-------|---|
| Product name            |                              |       |       |   |
| PT150/220...240<br>3DIM | ECG ambient temperature [ta] | 50    | 55    | - |
|                         | Temperature at tc-point [°C] | 80    | 85    | - |
|                         | Lifetime [h]                 | 60000 | 40000 | - |

Additional product data

|                                  |             |
|----------------------------------|-------------|
| Required IP rating of luminaire  | > 54        |
| Design / version                 | ECG outdoor |
| Suitable for lamp power (1 lamp) | 147 W       |

Capabilities

|                                         |                                                                                     |
|-----------------------------------------|-------------------------------------------------------------------------------------|
| Dimming interface                       | DALI / StepDIM / AstroDIM                                                           |
| Dimming range                           | 60...100 %                                                                          |
| Max. cable length to lamp/LED module    | 1.5 m                                                                               |
| Burn-in time prior to dimming operation | 10 min                                                                              |
| Overheating protection                  | Power reduction and switch off at T > 85 °C at the tc point                         |
| ECG reset time                          | > 0.5 s                                                                             |
| Dimmable                                | Yes                                                                                 |
| Restriction on ignition time            | 20 min                                                                              |
| Suitable for fixtures with prot. class  | I / II                                                                              |
| Lightning stroke protection             | With connected equipotentiality-terminal 10 surges with 10 kV acc. to IEC 61000-4-5 |
| Intended for no-load operation          | No                                                                                  |

Certificates & standards

|                           |                                                                                                                                             |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Approval marks – approval | ENEC 10 / VDE / VDE-EMC / EAC / C-Tick                                                                                                      |
| Type of protection        | IP20                                                                                                                                        |
| EEI – Energy Label        | A2                                                                                                                                          |
| Standards                 | Acc. to EN 61347-2-12/Acc. to EN 55015/Acc. to EN 61000-3-2/Acc. to EN 61547/Acc. to EN 62386-101/Acc. to EN 62386-102/Acc. to EN 62386-103 |

Logistical data


|                |             |
|----------------|-------------|
| Commodity code | 85041080900 |
|----------------|-------------|

Environmental information


| Information according Art. 33 of EU Regulation (EC) 1907/2006 (RECh) |                                                                                                    |
|----------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| Date of Declaration                                                  | 26-05-2023                                                                                         |
| Primary Article Identifier                                           | 4008321956385                                                                                      |
| Candidate List Substance 1                                           | Lead                                                                                               |
| CAS No. of substance 1                                               | 7439-92-1                                                                                          |
| Safe Use Instruction                                                 | The identification of the Candidate List substance is sufficient to allow safe use of the article. |

|                                  |                                      |
|----------------------------------|--------------------------------------|
| Declaration No. in SCIP database | eb7b8c7c-7483-4cb5-b5a0-3efaac249b6d |
|----------------------------------|--------------------------------------|


Wiring Diagram

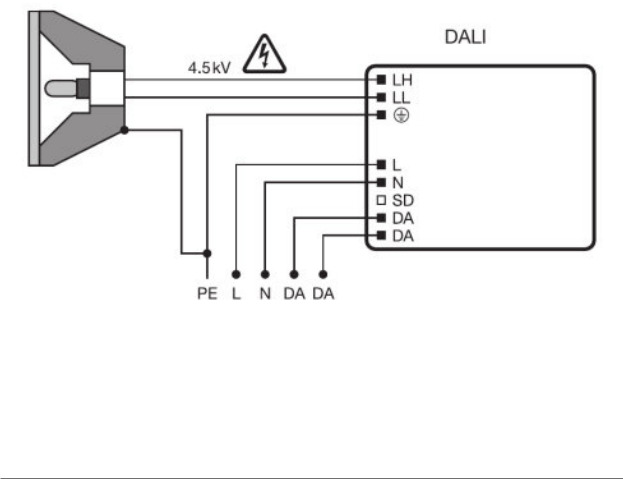


676796\_PTO 100-150 DALI

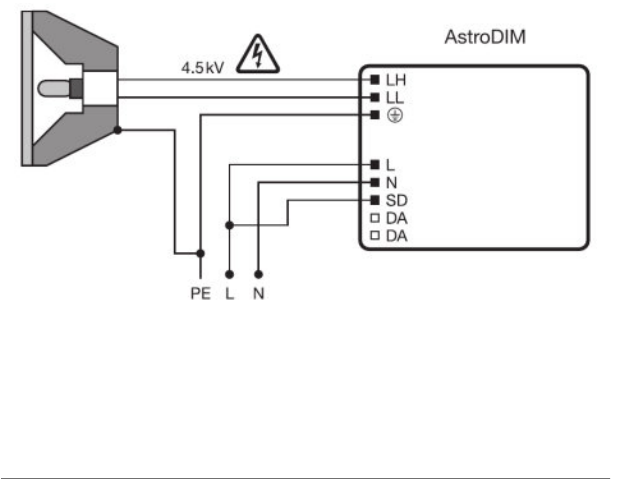

676797\_PTO 100-150 AstroDIM

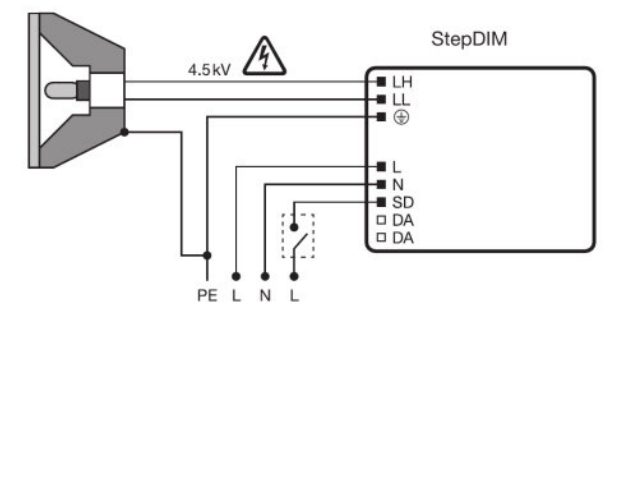

676798\_PTO 100-150 StepDIM

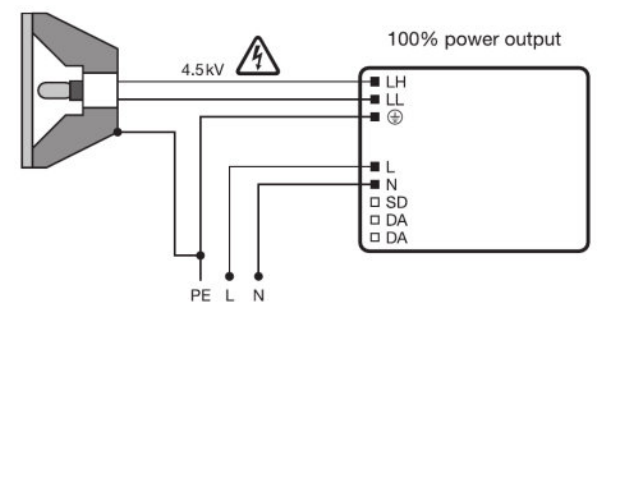

676799\_PTO 100-150 100% power output

# Product datasheet

## Safety advice

Ballast losses and lamp heat radiation can lead to heat accumulation in a completely closed case. Therefore it is necessary to ensure that the temperature at the measuring point t of the ECG does not exceed the maximum value.

## Attention!

For safety reasons disconnect the device before replacing the lamp!

## Additional product information

- An external relay connected in front of the SD port is necessary in StepDIM installations. The relay needs to be selected in a way that it is not switched or hold by the occurring leakage currents in the installation.
- In order to achieve good radio interference suppression:1. Keep the cable between ECG and lamp as short as possible.2. The single lamp wires must be routed as close as possible to each other.

## Download Data

| File                                                                                |                                                                    |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|
|  | User instruction<br>POWERTRONIC PTo                                |
|  | Tender documents<br>339884_Tender Document for POWERTRONIC EVG.eng |
|  | Certificates<br>554891_EAC PT family                               |
|  | Certificates<br>PTO PTi ENEC 40035813 020623                       |
|  | Declarations of conformity<br>PT_FIT PTi PTo CE 3363432 020823     |
|  | Declarations of conformity<br>Pti Pto PT-FIT EMC 280722            |
|  | Operating instructions<br>590728_EAC-PTO                           |
|  | CAD data 3-dim<br>341253_CAD data 3-dim &#150; PTo100_150 IGS      |
|  | CAD data 3-dim<br>341254_CAD data 3-dim &#150; PTo100_150.STEP     |

# Product datasheet

## Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

## Logistical Data

| Product code  | Product description    | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume                | Gross weight |
|---------------|------------------------|------------------------------|--------------------------------------|-----------------------|--------------|
| 4008321956385 | PTo 150/220...240 3DIM | Shipping carton box<br>10    | 313 mm x 273 mm x 193 mm             | 16.49 dm <sup>3</sup> | 10450.00 g   |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

# PTo 150/220...240 3DIM

POWERTRONIC OUTDOOR PTo | ECG for HID lamps, for outdoor lighting

| Product name           | Lamp group   |
|------------------------|--------------|
| PTo 150/220...240 3DIM | HCI-E/P 150W |
|                        | HCI-TS 150W  |
|                        | HCI-TT 150W  |
|                        | HQI-T 150W   |
|                        | HQI-T 70W    |
|                        | HQI-TS 150W  |
|                        | NAV-E 150    |
|                        | NAV-T 150    |
|                        | NAV-TS 150   |