

Large PAR Halogen




Areas of application

- Concert Lighting
- Club & Disco
- Stage & Theatre
- Architecture & Architainment

Product features and benefits

- The parabolic glass reflector and the front lens are fused together
- High luminous intensity
- Available in different beam angles to ensure high flexibility
- Easy lamp replacement



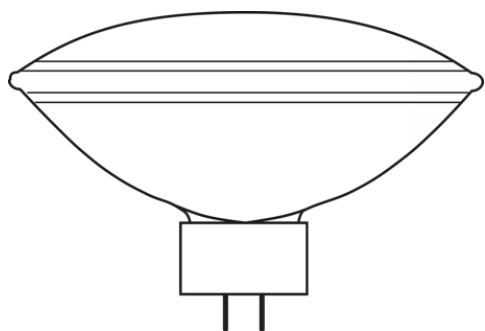

PAR 64 HALOGEN LAMPS

Product family datasheet

Technical data

| | Electrical Data | | Physical Attributes & Dimensions | Lifetime Data |
|---------------------------------|-----------------|-----------------|----------------------------------|------------------|
| Product description | Nominal wattage | Nominal voltage | Lamp base | Nominal lifetime |
| PAR64 64739/4 MFL ¹⁾ | 1000 W | 240 V | GX16d | 300 hr |
| PAR64 64738/4 NSP ²⁾ | 1000 W | 240 V | GX16d | 300 hr |
| PAR64 64737/4 VNSP | 1000 W | 240 V | GX16d | 300 hr |

¹⁾ Beam angle: MFL = medium flood

²⁾ Beam angle: NSP = narrow spot

Product family datasheet

Safety advice

To prevent personal injury or damage to property, halogen lamps may only be operated in suitable luminaires designed with suitable mechanisms (cover panel etc.) to ensure that in the event of a lamp bursting no parts/shards can escape and that during operation no ultraviolet radiation can escape. Because of the heat produced only heat-resistant lamp connections (holders) may be used. Do not operate near people, or any materials that are flammable, sensitive to heat or affected by drying out. Detailed information is available on request.

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.