

LINEARlight FLEX Tunable White IP00

Linear LED modules for flexible and individualized lighting solutions



Product family features

- 24 V LED strips flexible and cuttable
- Luminous flux: up to 3,800 lm/m
- Up to 60,000 h L90/B10 with SDT technology, tested acc. to IEC 62717 on real LED strips
- Adjustable color temp. via Tunable White: 2200...3500 K, 2500...4000 K, 2700...5700 K CRI90
- Adjustable color temp. via Tunable White: 2200...3500 K, 2500...3500 K, 2700...6500 K CRI80
- CRI80, CRI90 options available
- Stable light flux over length: active constant current regulators (ICs), PWM safe
- Embedded automatic quick protection against accidental miswiring up to 25 V
- Fully PWM dimmable from zero up to 2.5 kHz, audible noise free, suitable for quite places
- Designed, engineered and manufactured and tested in Italy (ISO9001, ISO 17025, ACCREDIA, VDE)

Product family benefits

- Color uniformity better than 3 SDCM on the entire LED strip and between strips
- LED lifetime acc.to IES LM-80 and IES TM-21 standards, and also internal OSRAM LAB tests
- Excellent robustness: single reel manufacturing technology (no solder joints on strip)
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back
- Extraordinary design and high quality materials
- Pre-soldered wires

Areas of application

- Cove lighting
- Shop lighting
- Offices



Product family datasheet

Technical data

Product description	Electrical data						Photometrical data
	Nominal voltage	Type of current	Nominal wattage per meter	Rated wattage	Input voltage range	Accidental reverse input voltage protection up to	Light color LED
LF3000TW -G1-827.865-03 L1	24.0 V	DC	27.7 W	83.10 W	23...25 V	25 V	White
LF4000TW -G3-827/865-02 ¹⁾	24.0 V	DC	36.8 W	77.30 W	23...25 V	25 V	Tunable White
LF2000TW -G3-827/865-04 ¹⁾	24.0 V	DC	18.5 W	83.20 W	23...25 V	25 V	Tunable White
LFP2X1600TWW -G1-824.835-02 ²⁾	24.0 V	DC	37.7 W	79.20 W	23...25 V	25 V	Tunable White
LF3400TW-G5 -927.957-03 L1	24.0 V	DC	30.2 W	90.70 W	23...25 V	25 V	Dynamic White
LF3400TW-G5 -925.940-03 L1	24.0 V	DC	32.4 W	97.30 W	23...25 V	25 V	Dynamic White
LF3400TW-G5 -922.935-03 L1	24.0 V	DC	34.7 W	104.00 W	23...25 V	25 V	Dynamic White
LF1100TW-G5 -927.957-09 L2	24.0 V	DC	9.8 W	88.40 W	23...25 V	25 V	Dynamic White
LF1100TW-G5 -925.940-09 L2	24.0 V	DC	10.4 W	93.60 W	23...25 V	25 V	Dynamic White
LF1100TW-G5 -922.935-09 L2	24.0 V	DC	10.9 W	98.50 W	23...25 V	25 V	Dynamic White

Product description	Color rendering index Ra	Luminous flux per meter	Luminous efficacy	Standard deviation of color matching	Light color (designation)	Dimensions & weight
						Length
LF3000TW -G1-827.865-03 L1	>80	3000 lm	108 lm/W	≤4 sdcn	Dynamic White	3000 mm
LF4000TW -G3-827/865-02 ¹⁾	>80	3800 lm	103 lm/W ⁴⁾	≤4 sdcn	Dynamic White	2100 mm
LF2000TW -G3-827/865-04 ¹⁾	>80	2000 lm	108 lm/W ⁴⁾	≤4 sdcn	Dynamic White	4500 mm
LFP2X1600TWW -G1-824.835-02 ²⁾	80	3200 lm	85 lm/W	≤4 sdcn	Dynamic White	2100 mm
LF3400TW-G5 -927.957-03 L1	90	3400 lm	113 lm/W	≤3 sdcn	2700...5700 K	3000 mm
LF3400TW-G5 -925.940-03 L1	90	3400 lm	105 lm/W	≤3 sdcn	2500...4000 K	3000 mm
LF3400TW-G5 -922.935-03 L1	90	3400 lm	98 lm/W	≤3 sdcn		3000 mm
LF1100TW-G5 -927.957-09 L2	90	1156 lm	118 lm/W	≤3 sdcn	2700...5700 K	9000 mm
LF1100TW-G5 -925.940-09 L2	90	1156 lm	111 lm/W	≤3 sdcn	2500...4000 K	9000 mm
LF1100TW-G5 -922.935-09 L2	90	1111 lm	102 lm/W	≤3 sdcn		9000 mm

Product family datasheet

Product description	Cable length	Product weight	Temperatures & operating conditions		Additional product data
			Temperature range in operation at Tc point	Temperature range at storage	Predecessor EAN
LF3000TW -G1-827.865-03 L1	500.0	42.00 g	-20...+85 °C ³⁾	-40...+85 °C	4052899953277
LF4000TW -G3-827/865-02 ¹⁾		25.00 g	-20...+85 °C ³⁾	-40...+85 °C	
LF2000TW -G3-827/865-04 ¹⁾		53.00 g	-20...+85 °C ³⁾	-40...+85 °C	
LFP2X1600TWW -G1-824.835-02 ²⁾		125.00 g	-20...+85 °C ³⁾	-40...+85 °C	
LF3400TW-G5 -927.957-03 L1	500.0	35.00 g	-20...+85 °C ³⁾	-40...85 °C	4062172032605, 4062172032629
LF3400TW-G5 -925.940-03 L1	500.0	35.00 g	-20...+85 °C ³⁾	-40...85 °C	
LF3400TW-G5 -922.935-03 L1	500.0	35.00 g	-20...+85 °C ³⁾	-40...85 °C	4052899563339
LF1100TW-G5 -927.957-09 L2	500.0	104.00 g	-20...+85 °C ³⁾	-40...85 °C	4062172032667, 4062172032643
LF1100TW-G5 -925.940-09 L2	500.0	104.00 g	-20...+85 °C ³⁾	-40...85 °C	
LF1100TW-G5 -922.935-09 L2	500.0	104.00 g	-20...+85 °C ³⁾	-40...85 °C	

Product description	Successor EAN	ID of contained light source	Certificates & standards	
			Standards	Energy efficiency class of the contained light source
LF3000TW -G1-827.865-03 L1	4062172189354		CE; ENEC 10 VDE/EAC/UL/CSA Recognized	F
LF4000TW -G3-827/865-02 ¹⁾	4062172032605		CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750	
LF2000TW -G3-827/865-04 ¹⁾	4062172032643		CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750	
LFP2X1600TWW -G1-824.835-02 ²⁾			CE/UL/Acc. to ENEC 10/EAC	
LF3400TW-G5 -927.957-03 L1		LS_TRV_286066	CE/ENEC/EAC	F
LF3400TW-G5 -925.940-03 L1		LS_TRV_286065	CE/ENEC/EAC	F
LF3400TW-G5 -922.935-03 L1		LS_TRV_286064	CE/ENEC/EAC	F
LF1100TW-G5 -927.957-09 L2		LS_TRV_286063	CE/ENEC/EAC	F
LF1100TW-G5 -925.940-09 L2		LS_TRV_286062	CE/ENEC/EAC	F
LF1100TW-G5 -922.935-09 L2		LS_TRV_286061	CE/ENEC/EAC	F

Product description	Logistical data	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)		
	Commodity code	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
LF3000TW -G1-827.865-03 L1	85395100000	07-07-2023	4062172032629	Lead
LF4000TW -G3-827/865-02 ¹⁾	940540399000	12-08-2022	4052899953260	
LF2000TW -G3-827/865-04 ¹⁾	940540399000	30-08-2022	4052899953284	
LFP2X1600TWW -G1-824.835-02 ²⁾	853951000000	18-04-2022	4052899563377	
LF3400TW-G5 -927.957-03 L1	85395100000	09-06-2023	4062172189354	Lead

Product family datasheet

	Logistical data	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)		
Product description	Commodity code	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
LF3400TW-G5 -925.940-03 L1	85395100000	09-06-2023	4062172189330	Lead
LF3400TW-G5 -922.935-03 L1	85395100000	09-06-2023	4062172189316	Lead
LF1100TW-G5 -927.957-09 L2	85395100000	09-06-2023	4062172189293	Lead
LF1100TW-G5 -925.940-09 L2	85395100000	09-06-2023	4062172189279	Lead
LF1100TW-G5 -922.935-09 L2	85395100000	09-06-2023	4062172189255	Lead

Product description	CAS No. of substance 1	Safe Use Instruction	Declaration No. in SCIP database
LF3000TW -G1-827.865-03 L1	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	52c5ad47-e42d-450a-b05f-d48d1695afd0
LF4000TW -G3-827/865-02 ¹⁾			In work
LF2000TW -G3-827/865-04 ¹⁾			In work
LFP2X1600TWW -G1-824.835-02 ²⁾			In work
LF3400TW-G5 -927.957-03 L1	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	6dfc036b-ceb0-4e6b-9095-48384a422e91
LF3400TW-G5 -925.940-03 L1	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	3b0dc5f1-547b-441b-bd5e-9960b615b212
LF3400TW-G5 -922.935-03 L1	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	9c2d531d-dbbb-487a-b4d4-50328cc7dc74
LF1100TW-G5 -927.957-09 L2	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	1e4aef2d-5fd2-4940-9779-142c985ead14
LF1100TW-G5 -925.940-09 L2	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	39d314f8-b6f9-41f5-acad-622e0887ed2a

Product family datasheet


Product description	CAS No. of substance 1	Safe Use Instruction	Declaration No. in SCIP database
LF1100TW-G5 -922.935-09 L2	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	103ac832-f72b-4c34- b09f-89e3b075d569

1) Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information (see www.osram.com/led-systems),/All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values


2) Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information (see www.osram.com/led-systems),/All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values/Pre-soldered wires 500 mm long on one end/In development, data preliminary

3) Exceeding the maximum ratings will reduce expected life time or destroy the LED strip.


4) For white color

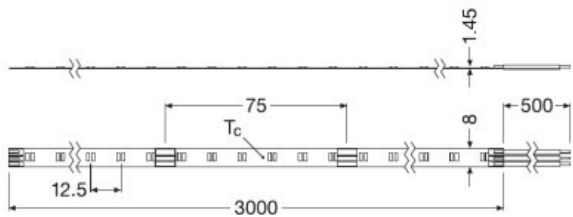


LF3000TW-G1-827.865-03

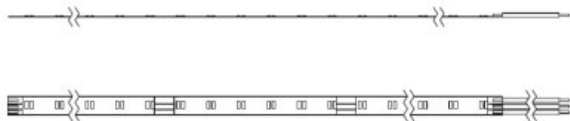


LF3000TW-G1-827.865-03

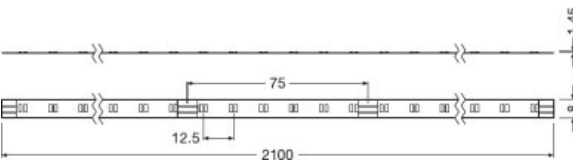


LINEARlight Flex Power Turnable White - G3

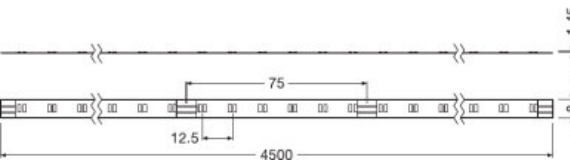

LINEARlight Flex Power Turnable White - G3

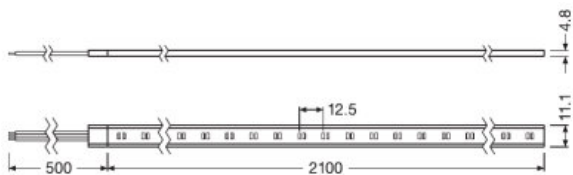


LFP3000TWW-G1

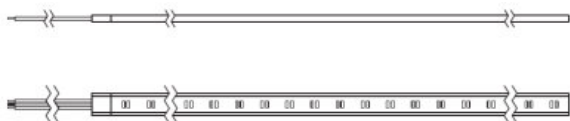


LFP3000TWW-G1

Product family datasheet

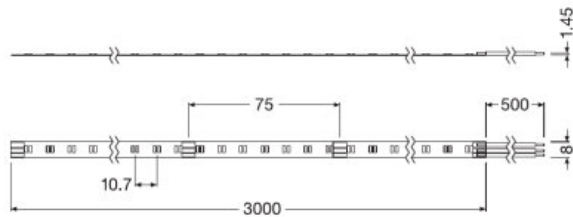

LINEARlight Flex Tunable White IP00 L1 drawing

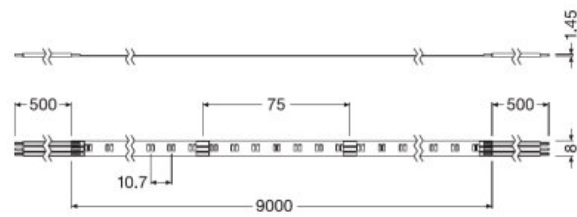

LINEARlight Flex Tunable White IP00 L2

Equipment / Accessories

- Flexessories: a complete set of aluminum channels with diffusers and lenses
- Simplified connection with optional matching CONNECTsystem
- Perfectly matched with OPTOTRONIC OTi DALI 50/220...240/24 TW
- Perfectly matched with OPTOTRONIC OTi DALI 80/220...240/24 TW

Application advice

For more detailed application information and graphics please see product datasheet.

Additional product information

- Some LED modules are equipped with a self-adhesive tape for attaching the LED module to suitable materials, such as aluminum profiles, which must be clean and free of oil or silicone coatings, as well as other dirt/dust particles. The adhesive tape is intended for single use and if removed may damage the material to which it is stuck and the LED module itself, which must then be scrapped. Use the adhesive tape when the installation material temperature is in the 18 °C...35 °C range. Complete adhesion takes up to 72 h.
- LED modules are designed for static installations in accordance with IPC 6013C – Use A. Take material vibrations, repetitive torsion, and elongation/compression into account.
- If the operating environment covers a broad temperature range (e.g. outdoor applications) and the operating length is longer than 2 m, the use of adequate mounting surfaces is required. The use of an additional thicker adhesive tape between LED module and mounting surface is also recommended in order to absorb the stress of any mismatch in expansion. Assure enough space for module expansion with increasing temperature.
- The manufacturer is not responsible for damage due to chemical corrosion. The user must provide suitable protection against corrosive agents such as moisture and condensation and any other harmful elements/compounds. Make certain to avoid corrosive atmospheres. According to the current state of LED technology, hydrogen sulfide (H₂S) causes accelerated corrosion which leads to shortened lifetime or premature failure. Sources of H₂S may be rubber, foam rubber, soft-foam tapes, rubber-based sealing, natural sources (e.g. sulfur springs), etc. To avoid H₂S from sulfur-vulcanized rubber use silicon-based materials or peroxide-crosslinked rubber instead. Follow the recommendations in the material datasheet of the rubber supplier.
- IP00 LED modules, as manufactured, have no conformal coating and therefore offer no inherent protection against corrosion. Conformal coating treatment is possible, however materials must be selected properly in order to avoid product damage or impaired performance; the user must also completely seal the cut parts (ends/edges).
- For applications involving exposure to humidity and dust the module must be protected by a fixture or housing with a suitable IP protection class.
- Consult OSRAM Technical Service for further advice.
- Only a qualified electrician may install the module.
- Handle with care and ensure that there is no mechanical product damage, including damage to invisible internal electronics parts.
- Exceeding maximum operating and storage temperature ratings can reduce the expected lifetime or even destroy the LED module. The temperature of the LED module must be measured at the T_c-point in accordance with EN 60598-1 under steady-state conditions, considering the worst case; drive all channels at 100 % power. Refer to the product drawing for the exact location of the T_c-point.
- Exceeding the maximum ratings for the operating voltage causes hazardous overload and will likely destroy the LED module.
- Installation of LED modules and connection to the power supply must comply with all applicable electrical and safety standards.
- Observe correct polarity and wiring diagrams! Incorrect polarity or wrong wiring can cause unpredictable permanent damage or even failure of the product.
- Never exceed the maximum operable length, including daisy-chaining connections.
- Always ensure electrical isolation between the LED module and the mounting surface, especially in the vicinity of connections or cut ends.
- IP00 LED modules are ESD-sensitive; take adequate precautions during installation and operation of the products.
- Use only SELV LED drivers in accordance with applicable lighting standards and LED module ratings. In order to safely operate OSRAM LED modules it is necessary to supply them with an electronically stabilized power supply providing protection against short circuits, overload and overheating. To simplify the approval process of the luminaire/installation, the electronic power supplies control gear for LED modules must bear the CE and ENEC marking. In Europe the Declarations of Conformity must include at least the following standards: EN 61347-2-13, EN 55015, EN 61547 and EN 61000-3-2. ENEC certification will be based on EN 61347-2-13 and EN 62384. OSRAM OPTOTRONIC LED drivers comply with all relevant standards and guarantee safe operation; see the relevant brochure for more detailed information about OSRAM OPTOTRONIC.
- Avoid installations in rural and urban areas with high industrial activity and heavy traffic (higher than class than 4C1 according IEC 60721-3) and as well as installation in spa, areas with chlorine atmosphere, direct exposure to blown sand.

Sales and Technical Support

Product family datasheet

Sales and Technical Support www.osram.com

Download Data

File	
	User instruction LINEARlight FLEX Tunable White
	Product Datasheet LINEARlight FLEX TW & TWW Specification Sheet (EN)
	Brochures Light is freedom of design (EN)
	Certificates LFyyyyTW G1 k27 q65 CE 4310213 180823
	Certificates UL Certificate
	Certificates ENEC10_VDE Certificate
	Certificates CB TEST CERTIFICATE DE- 60834
	Eulumdat LF3000TW-G1-827.865-03 L1 LTD 130521
	IES data LF3000TW-G1-827.865-03 L1 IES 130521
	User instruction LINEARlight FLEX POWER TW
	Product Datasheet 727335_LINEARLIGHT FLEX POWER TUNABLE WHITE TECHNICAL DATASHEET
	Certificates EAC Certificate
	Certificates ENEC+_VDE Certificate
	Certificates CB TEST CERTIFICATE DE1-57844
	Declarations of conformity Linearlight Flex Power TW CE 3388931 160623
	Declarations of conformity Manufacturer declaration
	Eulumdat 727228_LF4000TW-G3-827-865-02_LDT
	Eulumdat Eulumdat LF4000TW-G3-827-865-02
	IES data 727227_LF4000TW-G3-827-865-02_IES

Product family datasheet

	IES data 727226_LF4000TW-G3-827-865-02_IES
	IES data IES data LF4000TW-G3-827-865
	Eulumdat 727189_LF2000TW-G3-827-865-04_LDT
	Eulumdat Eulumdat LF2000TW-G3-827-865-04
	IES data 727188_LF2000TW-G3-827-865-04_IES
	IES data IES data LF2000TW-G3-827-865
	User instruction LINEARlight FLEX, Tunable White
	Product Datasheet LINEARlight Flex Tunable White CRI90 Specification Sheet (EN)
	Certificates VDE ENEC CERTIFICATE 40052516 160823
	Certificates LF(P) TW G5 CB 180121
	Declarations of conformity LR FLEX TW2 CE 4249165 02 020823
	Eulumdat LF3400TW-G5-927.957-03 L1 LTD 130421
	IES data LF3400TW-G5-927.957-03 L1 IES 130421
	Eulumdat LF3400TW-G5-925.940-03 L1 LTD 130421
	IES data LF3400TW-G5-925.940-03 L1 IES 130421
	Eulumdat LF3400TW-G5-922.935-03 L1 LTD 130421
	IES data LF3400TW-G5-922.935-03 L1 IES 130421
	Eulumdat LF1100TW-G5-927.957-09 L2 LTD 130421
	IES data LF1100TW-G5-927.957-09 L2 IES 130421
	Eulumdat LF1100TW-G5-925.940-09 L2 LTD 130421
	IES data LF1100TW-G5-925.940-09 L2 IES 130421
	Eulumdat LF1100TW-G5-922.935-09 L2 LTD 130421
	IES data LF1100TW-G5-922.935-09 L2 IES 130421

Product family datasheet

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172032629	LF3000TW -G1-827.865-03 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1269.00 g
4052899953260	LF4000TW -G3-827/865-02	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1373.00 g
4052899953284	LF2000TW -G3-827/865-04	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1357.00 g
4052899563377	LFP2X1600TWW -G1-824.835-02	Shipping carton box 8	365 mm x 286 mm x 366 mm	38.21 dm ³	5218.00 g
4062172189354	LF3400TW-G5 -927.957-03 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1213.00 g
4062172189330	LF3400TW-G5 -925.940-03 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1213.00 g
4062172189316	LF3400TW-G5 -922.935-03 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1213.00 g
4062172189293	LF1100TW-G5 -927.957-09 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1765.00 g
4062172189279	LF1100TW-G5 -925.940-09 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1765.00 g
4062172189255	LF1100TW-G5 -922.935-09 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1765.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Product family datasheet

Accessories Optional

Product description	Accessory name	Accessory code
LF3000TW -G1-827.865-03 L1	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
LF3000TW -G1-827.865-03 L1	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF3000TW -G1-827.865-03 L1	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF3000TW -G1-827.865-03 L1	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF3000TW -G1-827.865-03 L1	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF3000TW -G1-827.865-03 L1	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF3000TW -G1-827.865-03 L1	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF4000TW -G3-827/865-02	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
LF4000TW -G3-827/865-02	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF4000TW -G3-827/865-02	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF4000TW -G3-827/865-02	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF4000TW -G3-827/865-02	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF4000TW -G3-827/865-02	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF4000TW -G3-827/865-02	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF2000TW -G3-827/865-04	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
LF2000TW -G3-827/865-04	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF2000TW -G3-827/865-04	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF2000TW -G3-827/865-04	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF2000TW -G3-827/865-04	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF2000TW -G3-827/865-04	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF2000TW -G3-827/865-04	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LFP2X1600TWW -G1-824.835-02	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
LFP2X1600TWW -G1-824.835-02	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LFP2X1600TWW -G1-824.835-02	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LFP2X1600TWW -G1-824.835-02	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LFP2X1600TWW -G1-824.835-02	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LFP2X1600TWW -G1-824.835-02	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF3400TW-G5 -927.957-03 L1	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
LF3400TW-G5 -927.957-03 L1	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF3400TW-G5 -927.957-03 L1	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF3400TW-G5 -927.957-03 L1	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF3400TW-G5 -927.957-03 L1	FX-QMS-G1 -TU16H12-300	▶ 4052899448964

Product family datasheet

LF3400TW-G5 -927.957-03 L1	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF3400TW-G5 -927.957-03 L1	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF3400TW-G5 -925.940-03 L1	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
LF3400TW-G5 -925.940-03 L1	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF3400TW-G5 -925.940-03 L1	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF3400TW-G5 -925.940-03 L1	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF3400TW-G5 -925.940-03 L1	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF3400TW-G5 -925.940-03 L1	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF3400TW-G5 -925.940-03 L1	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF3400TW-G5 -922.935-03 L1	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
LF3400TW-G5 -922.935-03 L1	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF3400TW-G5 -922.935-03 L1	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF3400TW-G5 -922.935-03 L1	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF3400TW-G5 -922.935-03 L1	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF3400TW-G5 -922.935-03 L1	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF3400TW-G5 -922.935-03 L1	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF1100TW-G5 -927.957-09 L2	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
LF1100TW-G5 -927.957-09 L2	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF1100TW-G5 -927.957-09 L2	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF1100TW-G5 -927.957-09 L2	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF1100TW-G5 -927.957-09 L2	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF1100TW-G5 -927.957-09 L2	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF1100TW-G5 -927.957-09 L2	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF1100TW-G5 -925.940-09 L2	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
LF1100TW-G5 -925.940-09 L2	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF1100TW-G5 -925.940-09 L2	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF1100TW-G5 -925.940-09 L2	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF1100TW-G5 -925.940-09 L2	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF1100TW-G5 -925.940-09 L2	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF1100TW-G5 -925.940-09 L2	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF1100TW-G5 -922.935-09 L2	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
LF1100TW-G5 -922.935-09 L2	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF1100TW-G5 -922.935-09 L2	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF1100TW-G5 -922.935-09 L2	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF1100TW-G5 -922.935-09 L2	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF1100TW-G5 -922.935-09 L2	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF1100TW-G5 -922.935-09 L2	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.